

Model Shown:  
**RC2402P**




**Features**

**LOW HEIGHT POSITIVE MECHANICAL LOCK TO SUPPORT EXTENDED LOAD HOLDING.**

- Compact design where space is limited.
- Locking collar designed to support lifted load for extended periods of time with hydraulic pressure released.
- Integral tilt saddle comes standard and improves performance under side load, reducing the effects of off-center loading
- Overflow port (weep hole) prevents piston from being overextended under load.
- Special coating improves corrosion and abrasion resistance.
- Equipped with 3/8" NPTF female half couplers.

**Technical Dimensions**

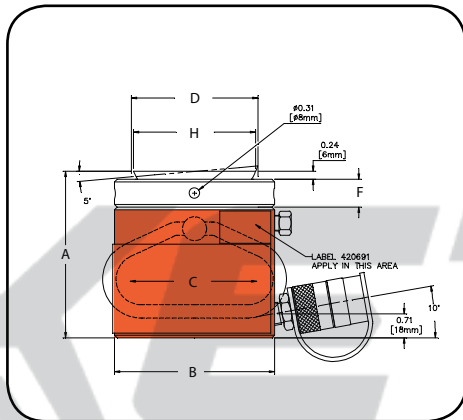

▶ Pancake locking cylinders are ideal for tight quartered locations.



**Ordering Information**

Cyl. Cap.	Stroke	Order No.	Oil Cap.	A	B	C	D	E	F	G	H	Prod. Wt.
(tons)	(in.)		(cu. in.)	Retracted Height	Outside Dia.	Bore Dia.	Piston Thread Dia.	Base to Port	Nut Thickness	Swivel Cap Protrusion	Swivel Cap Dia.	(lbs.)
55	2.00	RC0552P	21.66	4.92	4.72	3.74	3.74 x 4	0.75	0.83	0.24	3.62	24.25
100	1.75	RC1002P	36.43	5.39	6.50	5.12	5.12 x 6	0.83	1.22	0.31	4.96	48.50
155	1.75	RC1552P	55.23	5.83	8.07	6.30	6.30 x 6	1.06	1.50	0.35	5.83	85.98
240	1.75	RC2402P	86.23	6.10	10.04	7.87	7.87 x 6	1.10	1.57	0.39	6.18	130.07
380	1.75	RC3802P	134.74	7.01	12.60	9.84	9.84 x 6	1.38	1.97	0.43	9.45	242.51
620	1.75	RC6202P	220.78	7.56	15.94	12.60	12.60 x 6	1.50	2.36	0.39	11.61	425.49